




超高松厚度单面涂布食品卡 GCU
GC2 High Bulk

检测项目 Items		单位 Unit	检验方法 Test Method	偏差 Tolerance	标准 Standards										
定量 Grammage		g/m²	GB/T451.2 ISO536	±3%	200	215	220	235	240	250	270	295	300	325	350
厚度 Thickness		µm	GB/T451.3 ISO534	±3%	325	350	360	385	395	420	460	510	520	560	610
泰伯挺度 Taber Stiffness	CD	mN•m	GB/T22364 ISO2493	目标值 Target	3.73	5.02	5.37	6.66	7.14	7.84	10.2	12.9	13.1	16.6	23.1
				最小值 Min	3.17	4.27	4.56	5.67	6.07	6.67	8.67	11.0	11.1	14.1	19.6
	MD			目标值 Target	7.72	8.96	10.7	11.9	12.4	14.9	18.7	24.7	25.1	30.4	37.8
				最小值 Min	6.56	7.62	9.10	10.1	10.5	12.7	15.9	21.0	21.3	25.8	32.1
水分 Moisture		%	GB/T462 ISO287	±1.5	7.5					8.0					
亮度-Top Brightness (D65)		%	GB/T7974 ISO2470-2	≥	79.0										
PPS 表面粗糙度 Surface Roughness		µm	GB/T22363 ISO8791	≤	1.8										
光泽度 75° Gloss-Top		%	GB/T8941 ISO8254	≥	35										
印刷表面强度 IGT-Picking-Top		m/s	GB/T22365 ISO3783	≥	1.20										
层间结合强度 Ply bond		J/m²	GB/T26203 TAPPI 569	≥	130										
Cobb Top/Middle/Back(180s)		g/m²	GB/T1540 ISO535	≤	60										
荧光增白剂 Optical Brightening Agent		/	GB/ 31604.47	/	阴性 Negative										
偏斜度-平张 Squareness		mm	GB/T451.1	/	0~2										
尺寸偏差 Size Deviation		mm		/	0~2										
食品安全标准 Food Safety Standard		符合 GB 4806.8《食品安全国家标准 食品接触用纸和纸板材料及制品》标准 Qualified by GB4806.8'National food safety standards, food contact paper and paperboard materials and products'													

检测条件 Testing Condition:

温度 Temperature: (23±1)℃ 相对湿度 Relative Humidity: (50±2)%

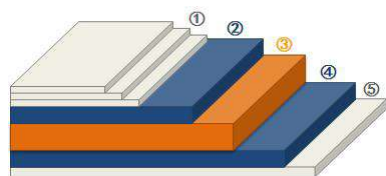

- ① 正面三道或二道刮刀涂布
- ② 面层
- ③ 芯层
- ④ 底层
- ⑤ 背面淀粉施胶

Surface blade coated
Top Layer, LBKP+NBKP
Middle Layer, BCTMP
Bottom Layer, LBKP+NBKP
Back starch sized

产品特点 Product Characteristics:

1、食品级，超高松厚度，挺度高；

Food grade, Super High bulk, good Stiffness.

2、用于直接、间接接触干性食品的包装盒、各种高档蛋糕盒等。

Packaging boxes for direct and indirect contact with various dry foods, high-grade cake boxes and so on